

FIG. 1

1: TELEVISION RECEIVER

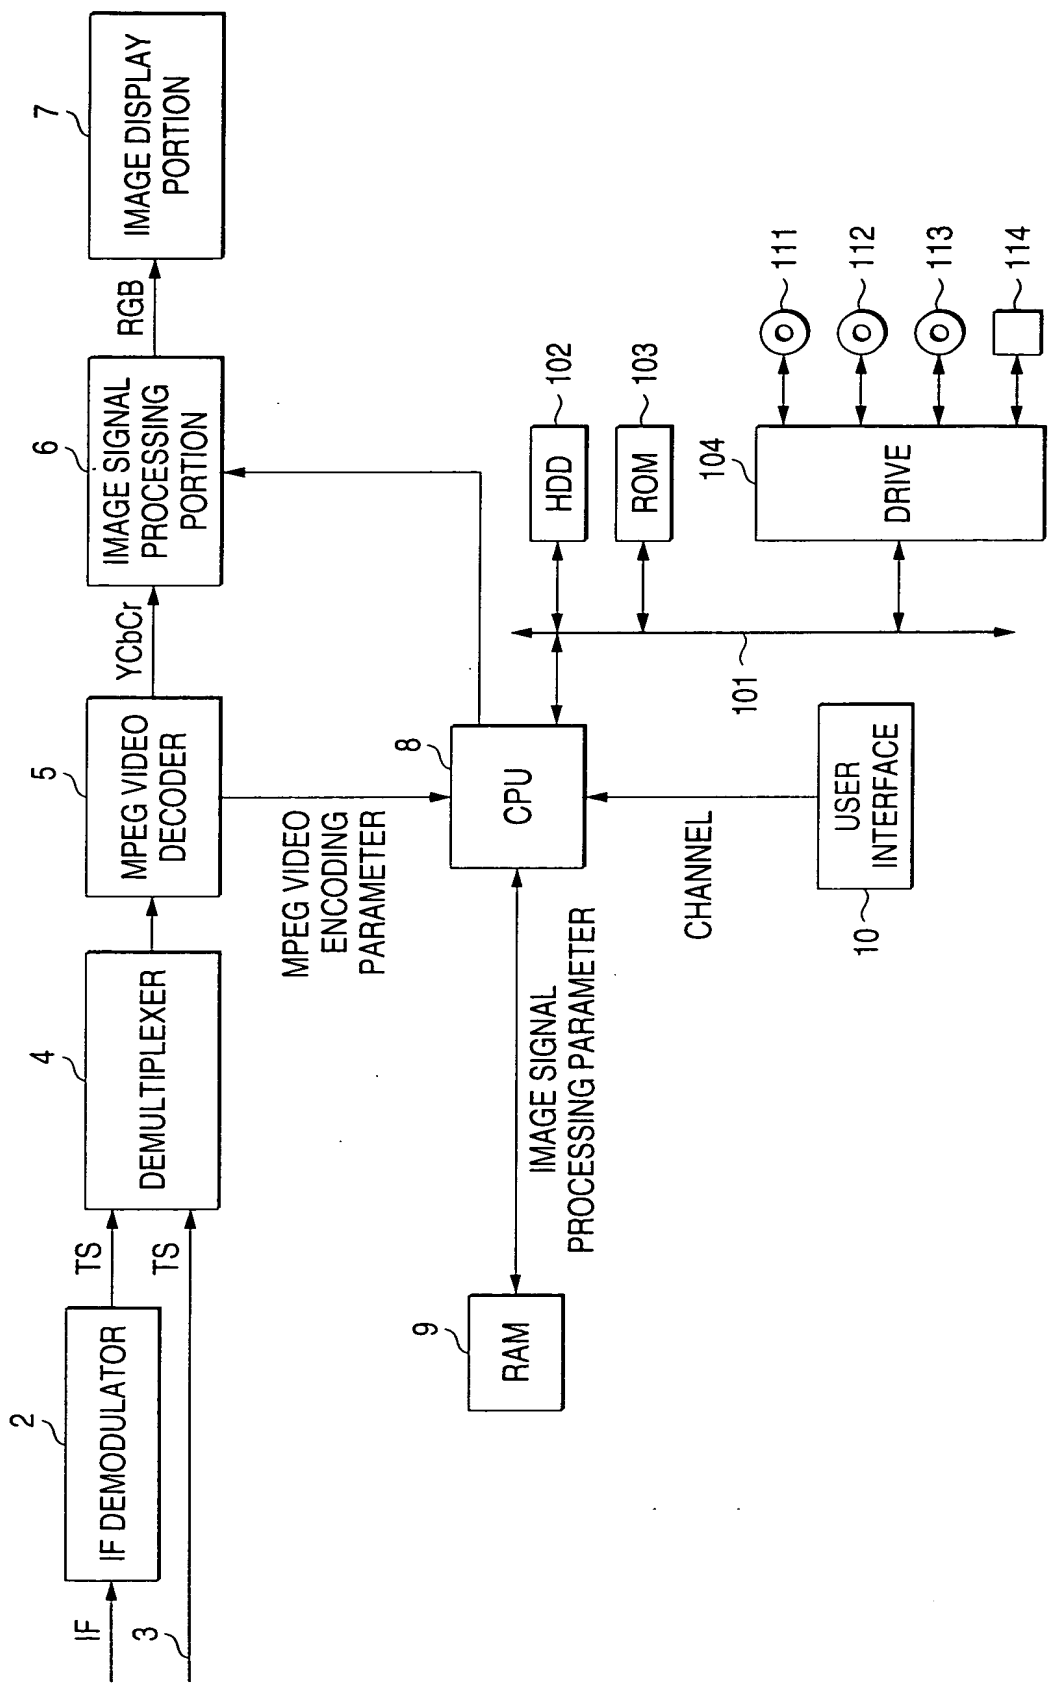


FIG. 2

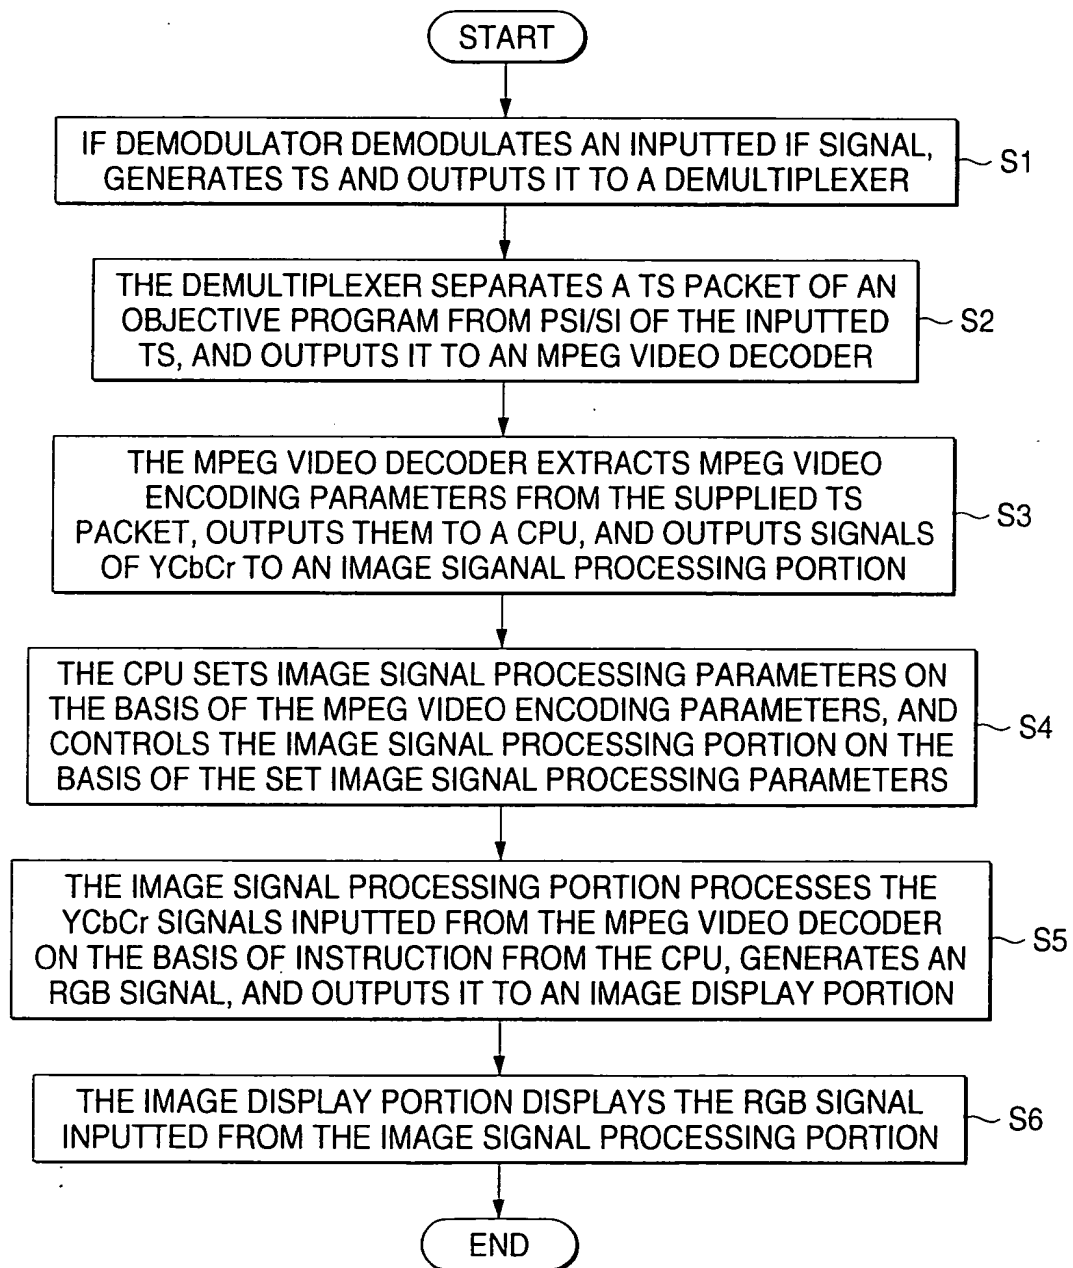


FIG. 3

## MPEG VIDEO ENCODING PARAMETER (EXAMPLE)

PROFILE/LEVEL DESIGNATION	MP/HL
NUMBER OF HORIZONTAL PIXELS	1920
NUMBER OF VERTICAL PIXELS	1080
ASPECT CC	16:9 DISPLAY
BIT RATE	22Mbps
FRAME RATE	30/1,001Hz
SCANNING SYSTEM	SEQUENTIAL SCANNING
COLOR INITIAL VALUE	PREScribed VALUE OF ITU-R RECOMMENDATION BT. 709
CONVERSION CHARACTERISTIC	PREScribed VALUE OF ITU-R RECOMMENDATION BT. 709
MATRIX COEFFICIENT	PREScribed VALUE OF ITU-R RECOMMENDATION BT. 709
REPEAT FIRST FLAG	FLAG USED AT 2:3 PULL DOWN

FIG. 4

## 1: TELEVISION RECEIVER

